




DOWNLIGHT  
**FUTURA PRO**

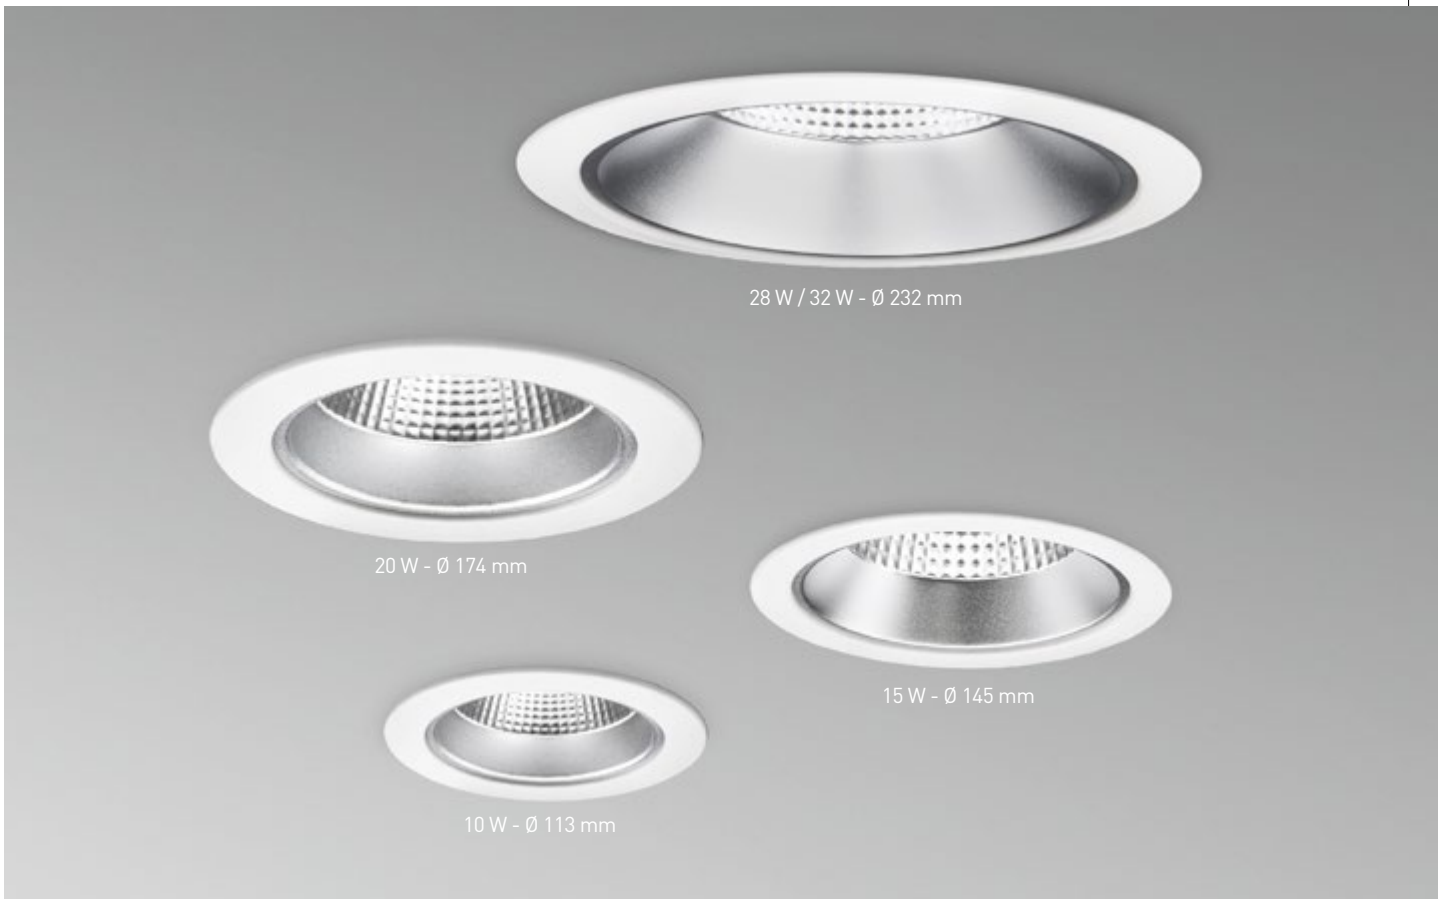

28 W / 32 W - Ø 232 mm

20 W - Ø 174 mm

15 W - Ø 145 mm


10 W - Ø 113 mm

DOWNLIGHT  
**FUTURA PRO**


TRICOLOR - UGR<19 - DIMMABLE

Apparecchio ad incasso professionale con parabola riflettente specchiata UGR>19 per un'esperienza visiva ottimale. Temperatura di colore personalizzabile tramite selettore CCT sul corpo in alluminio.

Professional recessed luminaire with UGR>19 mirrored reflector for an optimal visual experience. Customizable color temperature through CCT selector on the aluminum body.

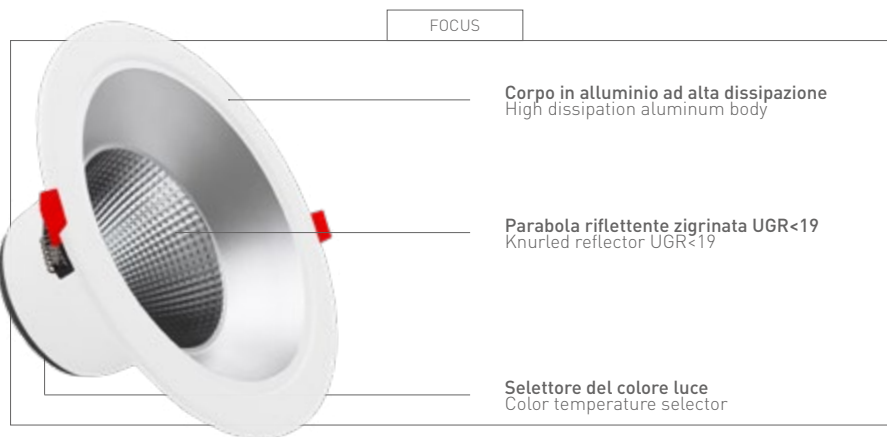

POLAR DIAGRAM

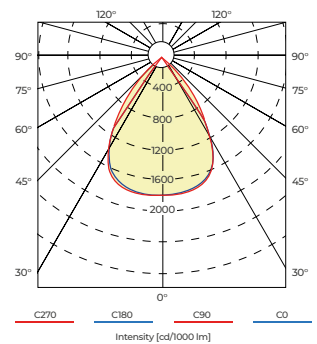

CONICAL DIAGRAM

Illuminance (lx)

	10 W	15 W	20 W	28 W	35 W
3 m	134,8	183,3	210,9	277,4	371,7
4 m	75,8	103,1	118,6	156,1	209,1
5 m	48,5	66	75,9	99,8	133,8
6 m	33,7	45,8	52,7	69,3	92,9

TECHNICAL NOTES




COMPLIANCE

EMC DIRECTIVE 2014/30/EU | EN 55015:2013 /A1:2015 | EN 61547:2009 | EN 61000 3-2:2014 | EN 61000 3-3:2013  
 LVD DIRECTIVE 2014/35/EU | EN 60598-1:2015+A1:2018 | EN 60598 2-2:2012 | EN 62471:2008 | EN 62493:2015  
 ROHS DIRECTIVE 2011/65/CE | IEC6231-5:2013 | IEC62321-7-1:2015 | IEC62321-7-2:2017 | IEC623 21-4:2017 | IEC62321-6:2015 | IEC 62321-8:2017


REGOLAZIONE DEL COLORE LUCE TRAMITE SELETTORE  
 COLOR TEMPERATURE ADJUSTMENT THROUGH SWITCH

**FUTURA PRO 10 W**




OUTPUT				
10 W	880 lm	3000K - 4000K - 6000K	<b>FTP-109000</b>	30,00 €
220-240 V	IP44	IP20	60°	DIMMABLE*  <19  ALUMINUM  50.000 H  DRIVER INCL  CCT  TRICOLOR  3 YEARS

**FUTURA PRO 15 W**




OUTPUT				
15 W	1.320 lm	3000K - 4000K - 6000K	<b>FTP-151200</b>	37,00 €
220-240 V	IP44	IP20	60°	DIMMABLE*  <19  ALUMINUM  50.000 H  DRIVER INCL  CCT  TRICOLOR  3 YEARS

**FUTURA PRO 20 W**



OUTPUT				
20 W	1.800 lm	3000K - 4000K - 6000K	<b>FTP-201400</b>	44,50 €
220-240 V	IP44	IP20	60°	DIMMABLE*  <19  ALUMINUM  50.000 H  DRIVER INCL  CCT  TRICOLOR  3 YEARS

**FUTURA PRO 28 W - 35 W**



OUTPUT				
28 W	2.500 lm	3000K - 4000K - 6000K	<b>FTP-281900</b>	61,00 €
35 W	3.150 lm	3000K - 4000K - 6000K	<b>FTP-351900</b>	68,00 €
220-240 V	IP44	IP20	60°	DIMMABLE*  <19  ALUMINUM  50.000 H  DRIVER INCL  CCT  TRICOLOR  3 YEARS

OPTIONAL

\*DIMMERABILE CON DRIVER DIMMABLE WITH DRIVER

7,8 W - 26,3 W	<b>RDFTPD-1020</b>	€ 57,50
36 W - 44 W	<b>RDFTPD-2835</b>	€ 55,00

IN 230 V OUT 9-52 V DALI PUSH

INCASSO