



LLD3P-108040



LLDAL-108040



LLDBA-108040




LLDSE-108040





220 cm

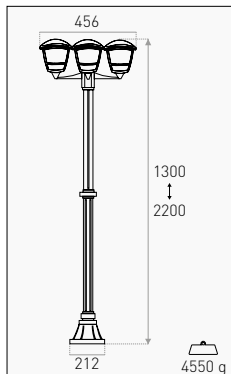


3 x 10 W	1.850 lm	4000K	LLD3P-108040	1/1	228,00 €
220-240 V	IP44	120°	ADJUSTABLE	PC DIFFUSER	ALUMINUM

TECHNICAL NOTES


ALTEZZA REGOLABILE
ADJUSTABLE HEIGHT

DISCENDENTE DESCENDING




10 W	806 lm	Standard	4000K	LLDAL-108040	1/6	43,00 €
220-240 V	IP44	120°	PC DIFFUSER	ALUMINUM		

ASCENDENTE ASCENDING



10 W	806 lm	Standard	4000K	LLDDBA-108040	1/6	43,00 €
220-240 V	IP44	120°	PC DIFFUSER	ALUMINUM		

SENSOR



10 W	806 lm	PIR Sensor	4000K	LLDSE-108040	1/6	50,50 €
220-240 V	IP44	120°	PIR SENSOR	LIGHT SENSOR	PC DIFFUSER	ALUMINUM

OPERATING MODE

Al tramonto, ON al rilevamento del movimento, il suo tempo di accensione varia dai 10 secondi ai 5 minuti. I lux sono regolabili.
At sunset, ON upon motion detection, working time is variable from 10 seconds to 5 minutes. Lux are adjustable.

Lampione ed applique in alluminio con verniciatura ad elettroforesi. Progettati per ambienti esterni, resistenti alla corrosione.

Garden lamp and applique in aluminum with electrophoresis painting, designed for outdoor environments, resistant to corrosion.



OPTIONAL

SORGENTE LED DI RICAMBO CON DRIVER
SPARE LED SOURCE WITH DRIVER



10 W	806 lm	4000K	RSLLD	1/100	15,50 €
------	--------	-------	--------------	-------	---------