




INCASSO
P-TONDO


PANNELLI INCASSO
P-TONDO

P-TONDO




	A mm	mm	g
3 W	Ø85	Ø70	112
6 W	Ø117	Ø105	142
9 W	Ø147	Ø130	181
12 W	Ø170	Ø155	236
18 W	Ø225	Ø205	373
24 W	Ø300	Ø280	580

	SOURCE	OUTPUT			
3 W	260 lm	180 lm	3000K	PT-038530	9,50 €
			4000K	PT-038540	
6 W	550 lm	400 lm	3000K	PT-061230	12,00 €
			4000K	PT-061240	
9 W	780 lm	600 lm	3000K	PT-091430	14,00 €
			4000K	PT-091440	
12 W	1.100 lm	960 lm	3000K	PT-121730	15,50 €
			4000K	PT-121740	
18 W	1.800 lm	1.440 lm	3000K	PT-182230	20,50 €
			4000K	PT-182240	
24 W	2.350 lm	1.920 lm	3000K	PT-243030	30,00 €
			4000K	PT-243040	



EXPLODED VIEW

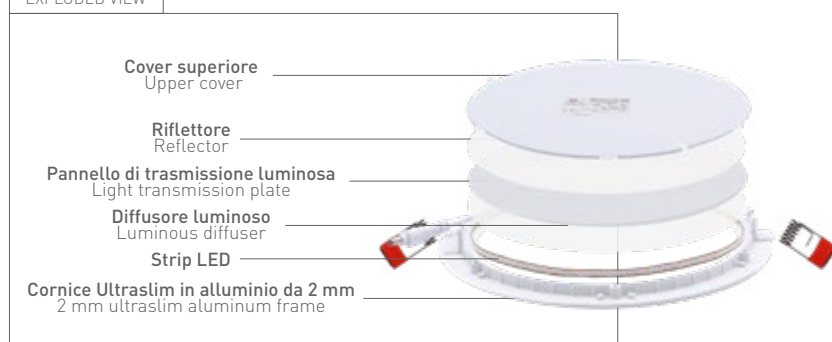

OPTIONAL PAG. 44-47

ALIMENTATORI E ACCESSORI
POWER SUPPLIES AND ACCESSORIES

COMPLIANCE

Ottica antiabbaglio, alimentatore esterno in dotazione, assenza di raggi UV e IR.
Design elegante ultrasottile.

Anti-glare optics, external power supply included, UV and IR rays free.
Ultra-thin elegant design.

EMC DIRECTIVE 2014/30/EU | EN 55015:2013+A1:2015 | EN 61547:2009 | EN 61000-3-2:2014 | EN 61000-3-3:2013
LVD DIRECTIVE 2014/35/EU | EN-60598-1:2015+A1:2018 | EN-60598-2-2:2011 | IEC 60598-1:2014 | EN 62493:2015
ROHS DIRECTIVE 2011/65/CE | IEC 6231-5:2013 | IEC 62321-7-1:2015 | IEC 62321-7-2:2017 | IEC 62321-4:2017 | IEC 62321-6:2015 | IEC 62321-8:2017