



PROIETTORE  
**SIRIO BT**

PROIETTORE  
**SIRIO BT**

12-36  
V/DC

IK08

IP65

SORGENTI

GO SMART

VERSATILI

INDOOR


OUTDOOR

SOLARI

WORK

PROFESSIONAL

ESPOSITORI




	A mm	B mm	C mm	g
20 W	120	115	24	250
30 W	155	125	24	350
50 W	200	165	33	600

OUTPUT

20 W	1.750 lm	Black ■	4000K ■	<b>SRSBT-203640</b>	1/20	30,00 €
30 W	2.540 lm	Black ■	4000K ■	<b>SRSBT-303640</b>	1/20	40,00 €
50 W	4.400 lm	Black ■	4000K ■	<b>SRSBT-503640</b>	1/20	72,00 €

12-36 V IP65 IK08 110° S.E.L.V. HIGH DISSIPATION ULTRASLIM DIE-CAST ALUMINUM GLASS

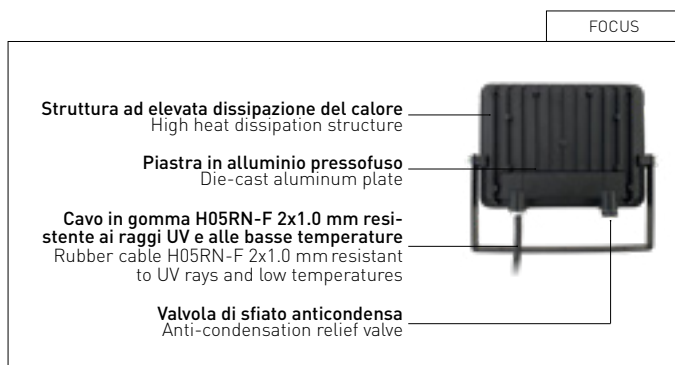

TECHNICAL NOTES

S.E.L.V. (SAFETY EXTRA LOW VOLTAGE)



NO 230 V/AC



Corpo in alluminio pressofuso, diffusore in vetro antiabbaglio, piastra in puro alluminio ad alto potere dissipante. Non adatto ad essere alimentato dalla convenzionale corrente 220-240 V/AC.

Body in die-cast aluminum, diffuser in anti-glare glass, plate in pure aluminum with high dissipating power. Not suitable to be powered by conventional 220-240 V/AC current.

IDEALE IN SISTEMI DI VIDEOSORVEGLIANZA E SICUREZZA CON PANNELLI FOTOVOLTAICI, SU IMBARCAZIONI, CAMPER, MEZZI DA CANTIERE E DI SOCCORSO.  
SUITABLE FOR VIDEO SURVEILLANCE AND SECURITY SYSTEMS WITH PHOTOVOLTAIC PANELS, ON BOATS, CAMPER, CONSTRUCTION AND RESCUE VEHICLES.